

# ECCOSORB® SFU

Thin, Flexible, Resonant Absorbers

## Material Characteristics

- Thin, flexible, narrowband resonant absorber
- Magnetically loaded urethane rubber sheets
- Urethane absorbers offer increased abrasion resistance
- Frequency range from 2-16 GHz
- Does not support fungal growth per MIL-STD-810E
- Reflectivity of 1% (-20dB) or less of the normal incident microwave energy at the design frequency
- Will withstand temperatures from -40°F to 248°F (-40°C to 120°C)

## Applications

- ECCOSORB® SFU is ideally suited for applications requiring a very thin microwave absorber where broadband performance is not essential. Such as; lining radar nacelles and the lining of cavity backed and shrouded telecommunication antennas


## Availability

- Standard sheets are 12" x 12" (30.5cm x 30.5cm)
- Thickness depends on resonant frequency desired
- Can be supplied with a Pressure Sensitive Adhesive (PSA) specifically designed for urethanes. Product designation denoting ECCOSORB® SFU with a PSA is ECCOSORB® SFU-XX/SS3
- For optimum performance, material is recommended and can be supplied with a metal backing (ML)
- Other resonant frequencies from 0.7 GHz to 40 GHz can be supplied on special order
- ECCOSORB® SFU is available in customer specified configurations

## Instructions for Use

- The performance of ECCOSORB® SFU requires that it be intimately backed with a metal surface. If a metal surface is not available, ECCOSORB® SFU can be supplied metal backed with aluminum foil (ML)
- Where the speed and convenience of a pressure sensitive adhesive is desired, ECCOSORB® SFU can be bonded to a surface using the factory installed SS3 pressure sensitive adhesive

## Typical Reflectivity Performance

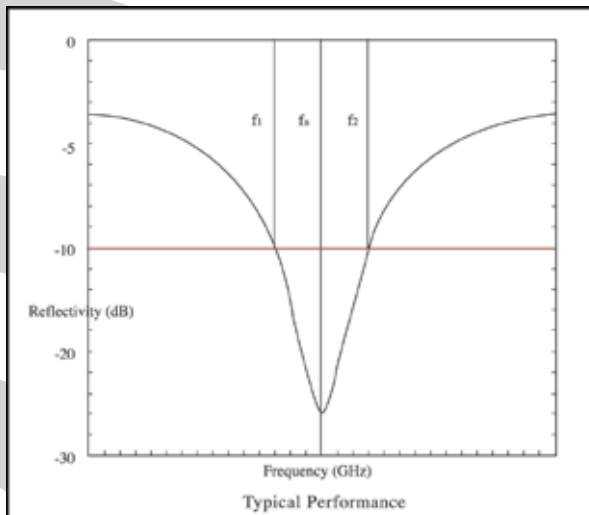

The performance of ECCOSORB® SFU is defined by reflectivity at a single frequency. A generalized performance curve is shown above. The design frequency  $f_0$ , has a  $\pm 5\%$  bandwidth, designated as  $f_1$  and  $f_2$ . Although performance degrades with increased incidence angle, at incident angles out to  $45^\circ$ , reflectivity of -16dB has been demonstrated.

## Typical Properties

Resonant Frequency Designation	Thickness		Weight	
	inch	mm	lb/ft <sup>2</sup>	kg/m <sup>2</sup>
SFU-2.5	0.098	2.50	2.4	11.7
SFU-3.5	0.094	2.38	2.1	10.2
SFU-4.5	0.111	2.82	2.5	10.0
SFU-5.5	0.098	2.49	1.8	8.9
SFU-6.0	0.090	2.28	1.7	8.2
SFU-7.0	0.079	2.00	1.5	7.1
SFU-8.0	0.091	2.30	1.4	6.7
SFU-9.0	0.081	2.07	1.3	6.1
SFU-10.0	0.075	1.90	1.2	5.6
SFU-12.0	0.067	1.70	1.1	5.1
SFU-14.0	0.061	1.56	0.9	4.6
SFU-16.0	0.057	1.45	0.9	4.3

EMERSON & CUMING MICROWAVE PRODUCTS, INC., 28 York Avenue, Randolph, MA 02368 / Telephone (781) 961-9600. Use of Information and Material: Values shown are based on testing of laboratory test specimens and represent data that falls within normal range of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material for any purpose contemplated by the user and the manner of such use is the responsibility of the user. The user should determine that the material meets the needs of the user's product and use. We hope that the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES, which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use, which would infringe any patent or copyright. Emerson & Cuming Microwave Products Inc.

EMERSON & CUMING  
MICROWAVE PRODUCTS HONG KONG LTD.

Tel: + 852-2620 6389  
Fax: +852-2620 6619  
E-mail : sales@hk.eccosorb.com  
Website : www.eccosorb.com



EMERSON & CUMING MICROWAVE PRODUCTS, ALWAYS ON YOUR WAVELENGTH